



Carling Technologies®

Innovative Designs. Powerful Solutions.

THERMAL CIRCUIT PROTECTION



CATALOG

FOUNDED IN 1920



Since its founding, Carling Technologies has continually forged a tradition of leadership in quality and product innovation.

There are few products that Carling Technologies hasn't turned "ON" and fewer industries that haven't turned to Carling for solutions. With ISO and TS registered manufacturing facilities and technical sales offices worldwide, Carling ranks among the world's largest manufacturers of circuit breakers, switches, power distribution units, digital switching systems and electronic controls.



SWITCHES & CONTROLS

- Rocker
- Toggle
- Pushbutton
- Rotary

CIRCUIT PROTECTION

- Hydraulic-Magnetic
- Thermal
- GFCI / ELCI

CUSTOM SOLUTIONS

- PDU's
- Keypads
- Control Modules

MULTIPLEXED POWER SYSTEMS

- HMI Devices & I/O Modules
- Programmable Displays
- Data Communication Interfaces
- Electrical Systems Monitoring

STRATEGIC MARKETS SERVED:



On/Off Highway



Marine



Telecom/Datacom



Military



Renewable Energy

GLOBAL LOCATIONS:

Carling Technologies
World Headquarters
Plainville, CT, USA
ISO9001:2015
IATF16949:2016

Carling Technologies
Brownsville, TX, USA
ISO14001:2015
ISO9001:2015
IATF16949:2016

Carling Technologies
Matehuala, Mexico
ISO14001:2015
ISO9001:2015
IATF16949:2016

Carling Technologies,
Maretron
Jupiter, FL, USA

Carling Technologies
European Headquarters
Exeter, UK
ISO9001:2015
IATF16949:2016

Carling Technologies
Kowloon,
Hong Kong
ISO9001:2015
IATF16949:2016

Carling Technologies
Zhongshan,
China
ISO14001:2015
ISO9001:2015
IATF16949:2016

OTHER SERVED INDUSTRIES:



Medical



Industrial Control



Audio / Visual



Commercial Food



HVAC



Floor Care



Generators



Small Appliances



Security Systems



Test & Measurement

WORLDWIDE NUMBERS:



2400+
EMPLOYEES



150+
ENGINEERS

COMPETITIVE ADVANTAGES⁺



Innovative &
Eco-Friendly Products



Excellent Quality &
Customer Service



Reliable &
On-Time Delivery



Vertical
Integration



70+
DISTRIBUTORS



50+
REP FIRMS

TABLE OF CONTENTS

Selector Guide	2
C1005B-SERIES	3
Ordering Scheme.....	4
Dimensional Specifications	4
Time Delay.....	4
CLB-SERIES	5
Ordering Scheme.....	6
Dimensional Specifications	7
Time Delay.....	7
CMB-SERIES	8
Ordering Scheme.....	9
Dimensional Specifications	10
Time Delay.....	10
CTB-SERIES	11
Ordering Scheme.....	12
Dimensional Specifications	12
Time Delay.....	12

HELPFUL TIP

Click on a product to go directly to that page number!

Thermal Circuit Protectors

This catalog features Carling Technologies' current line of thermal circuit protectors, from 3 to 60 amps, which offer reliable, cost effective circuit protection. Thermal circuit protectors utilize a bimetallic strip electrically in series with the circuit. The heat generated by the current during an overload deforms the bimetallic strip and trips the breaker. Thermal protectors have a significant advantage over fuses in that they can be reset after tripping. They can also be used as the main ON/OFF switch for the equipment being protected.

Typical Applications Include:

- Household Appliances
- Transportation
- Marine
- Power Strips
- Medical Equipment
- Audio Visual Equipment
- Power Supplies
- Exercise Equipment

Available Online are tools such as a [configurit](#), [product selector](#) and [stock check](#). Please visit www.carlingtech.com for the latest information on all our products.

Application Solution Engineers are readily available to assist you in selecting the appropriate product for your application. For further assistance, please email us at team2@carlingtech.com

Custom Design Solutions can be tailor-made for most any application using our extensive engineering resources.

Other Products such as hydraulic-magnetic and ground fault circuit breakers, switches and miniature switches are also available.

© 2020 Carling Technologies, Inc.

Carling Technologies is a registered trademark of Carling Technologies, Inc. in the U.S. and other countries.

SELECTOR GUIDE

				
C1005B-Series	CLB-Series	CMB-Series	CTB-Series	
1	1	1	1	Poles
rocker, lighted rocker	pushbutton	pushbutton	rocker	Actuator Style
7 to 16A, 125-250VAC, 32VDC	3 to 60A, 125-250VAC, 32 VDC	3 to 20A, 125-250VAC, 32 VDC	3 to 16A, 125-250VAC, 50VDC	Max Current & Voltage Ratings
1000A	2500A@32VDC	2500A@32VDC	1000A	Max Interrupting Capacity
series trip manual reset	series trip manual reset	series trip manual reset	series trip manual reset	Available Circuits
.250" tab, solder lug	.250" tab, .250" tab with 90° bend, screw terminal, screw terminal with 90° bend	.250" tab, .250" tab with 90° bend, screw terminal, screw terminal with 90° bend	.250" tab	Termination
front panel snap-in	threaded bushing, front panel snap-in	threaded bushing, front panel snap-in	front panel snap-in	Mounting Method
-10°C to 65°C	-10°C to 60°C	-10°C to 60°C	-10°C to 60°C	Operating Temperature
UL, cUL, TUV	UL, cUL, TUV, CE, ISO 8846 for ignition protection / marine	UL, cUL, TUV, CE, ISO 8846 for ignition protection / marine	UL, cUL, VDE, CE	Agency Approvals

*Options and approvals shown may apply to specific construction combinations only, consult factory for clarification.
 Manufacturer reserves the right to change product specifications without prior notice.

C1005B-Series

THERMAL CIRCUIT BREAKERS

The C1005B-Series offers the functionality of a switch and circuit breaker in a single compact package, which fits an industry standard .550 x 1.125 mounting hole. This combo device eliminates the need for both a switch and thermal circuit protector on customer panels. By using only this multipurpose product, wiring and assembly costs are greatly reduced, while at the same time, valuable panel real estate is saved.

The C1005B-Series is available lighted or unlighted, in a variety of colors, with solder lug or .250 tabs. Current ratings range from 7-16 amps at 125 and 250 VAC and up to 32 VDC.



Resources:

[Configure a Complete Part](#)

[**Download CAD & Sales Drawing >**](#)

Product Highlights

- .550 x 1.125 mounting hole (14mm x 28.6mm)
- Ratings from 7-16A
- Standard Reset/Off Legend
- .250 Tabs or Solder Lug Terminations
- 65°C Max Operating Temperature
- 1000 AIC Interrupting Capacity
- 1500 VAC Dielectric Strength
- 100M ohms @500VDC Insulation Resistance
- UL1077, UL1363, IEC 60934

Typical Applications:

- Household and Commercial Appliances
- On/Off-Highway
- Marine
- Telecom
- Power Strips and Supplies
- Audio-Visual Equipment
- Medical
- Generators

C1005B - 3 B 15 1 B R 3

1
Series

2
Illumination Termination

4
Current Rating

5
Contact Material

6
Bezel Legend

7
Rocker Color

8
Lamp Voltage

1 SERIES C1005B

2 ILLUMINATION

- 2 Non-Lighted
3 Lighted

3 TERMINATION

- A Solder Lug
B .250 Tab

4 CURRENT RATING (AMPERES)

07	7 amps	12	12 amps
08	8 amps	13	13 amps
09	9 amps	14	14 amps
10	10 amps	15	15 amps
11	11 amps	16	16 amps

5 CONTACT MATERIAL 1

- 1 Silver Cad Oxide (switch), Silver plated copper (breaker)

6 BEZEL LEGEND IMPRINT

- B Black Bezel with white legend
W White Bezel with black legend
C Gray Bezel with black legend

7 ROCKER COLOR

- R Red
G Green
U Blue
T Clear

Note: RESET OFF Legend is standard.


8 LAMP VOLTAGE

- 3 Neon Lamp 125/250 VAC
9 Non-lighted


Notes:

1. Silver cad oxide switch and breaker contacts are available as a special order. Specify 3 for selection 5

Dimensional Specifications: in. [mm]

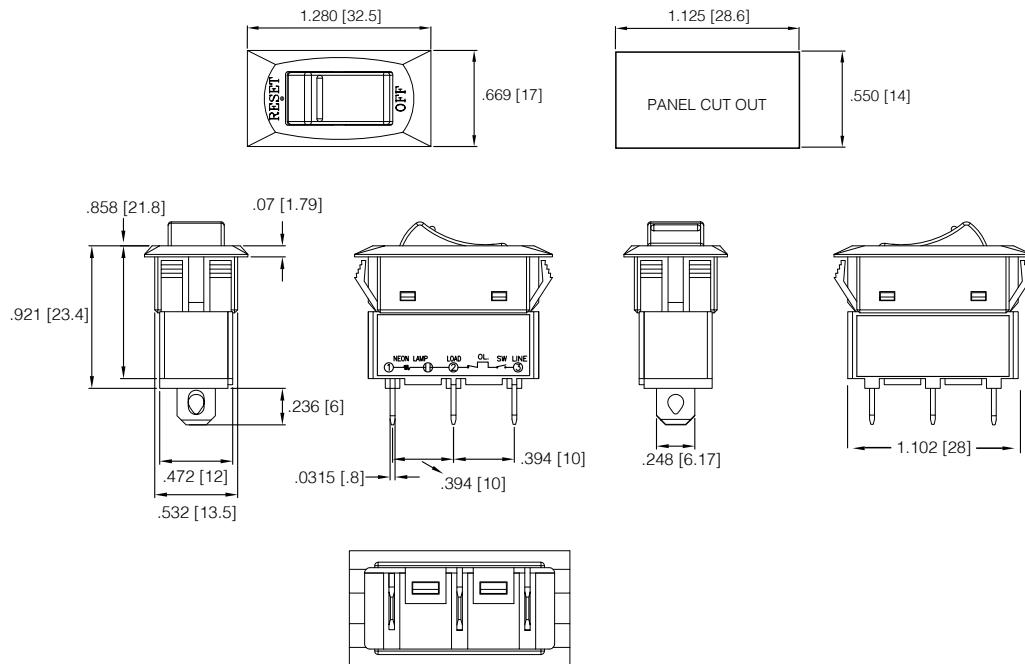

Time Delay

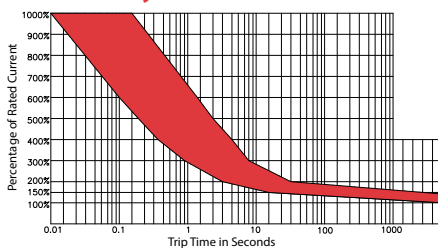

Overload	Trip Time
100%	No Trip
150%	Trip in 1 hr
200%	4.0 ~ 40 sec.
300%	0.9 ~ 8.0 sec.
400%	0.42 ~ 5.0 sec.
500%	0.25 ~ 3.0 sec.
600%	0.01 ~ 1.8 sec.

Time Trip Factor 1	
-10 °C	x 1.70
-5 °C	x 1.60
0 °C	x 1.50
5 °C	x 1.40
10 °C	x 1.30
15 °C	x 1.20
20 °C	x 1.10
25 °C	x 1.00

Time Trip Factor 1	
30 °C	x 0.90
35 °C	x 0.85
40 °C	x 0.80
45 °C	x 0.75
50 °C	x 0.70
55 °C	x 0.65
60 °C	x 0.60

Notes:

1. Trip Time factor is a guideline that indicates ambient temperature effect on trip times at various overload values.

*Manufacturer reserves the right to change product specification without prior notice.

CLB-Series

THERMAL CIRCUIT BREAKERS

The CLB-Series is a compact, single pole, push-to-reset family of thermal circuit breakers designed to protect equipment. Utilizing simple, precision design with few moving parts, these breakers offer cost effective, extremely reliable circuit protection with high resistance against shock and vibration.



Resources:

[Configure a Complete Part](#)

[Download CAD & Sales Drawing >](#)

Product Highlights:

- Ratings from 3-60A, 125, 250VAC, 32VDC
- 2500 VAC/1 minute
- 60°C Max Operating Temperature
- 2500A @ 32VDC Interrupting Capacity
- 100M ohms Insulation Resistance
- Voltage drop <0.25 V
- UL, cUL, CSA, TUV, CE
- UL1500/ISO8846 for ignition protection/marine

Applications:

- Household Appliances
- On/Off-Highway
- Marine
- Power Strips
- Medical Equipment
- Audio Visual Equipment
- Power Supplies
- ROHS Complaint

CLB - 10 3 - 12 C 3 B - B - A / 10

1 Series 2 Rating 3 Voltage 4 Mounting Hole 5 Bushing Type 6 Mounting Nut 7 Indicator Plate 8 Button 9 Terminal 10 Button Marking

1 SERIES

CLB

3 VOLTAGE


3 125-250VAC/ 32 VDC

2 RATING

03	3 amps	15	15 amps
04	4 amps	18	18 amps
05	5 amps	20	20 amps
06	6 amps	25	25 amps
07	7 amps	30	30 amps
08	8 amps	35	35 amps
10	10 amps	40	40 amps
12	12 amps	50 ¹²	50 amps
13	13 amps	60 ¹²	60 amps

4 MOUNTING HOLE

11 1 M11
12 2 M12
00 3 Snap In Style
27 4 3/8" 27 UNS

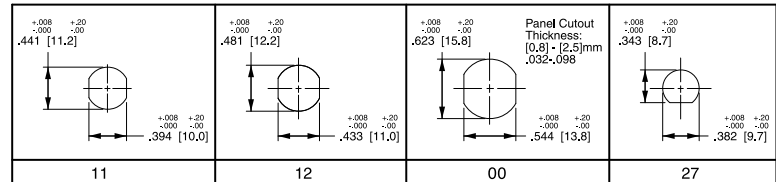


5 BUSHING

METAL

A⁶ Type A
B¹⁶ Type B
J⁸ Type J


PLASTIC

C⁵ Type C
D⁷ Type D
E⁸ Type E

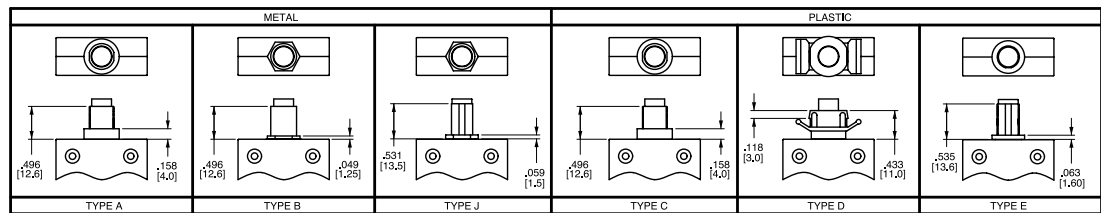

6 MOUNTING NUT 9

N None
1 Type 1
2 Type 2
3¹⁷ Type 3
4 Type 4
5 Type 5
6^{4, 14} Type 6
7⁴ Type 7
8⁴ Type 8

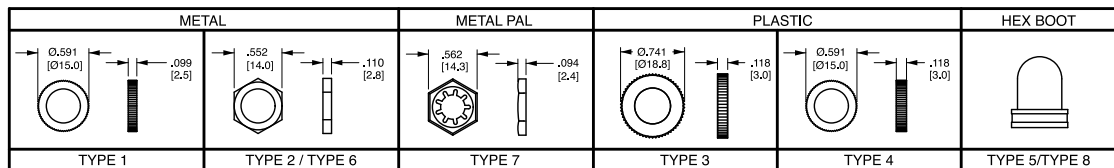


NOTE: Type 5 is clear hex boot. Type 8 is black hex boot (available for bushings E & J only); Type 3 nut includes molded in "PRESS TO RESET" marking.

7 INDICATOR PLATE 9

N None
A Embossed
B Silver Printing on Black

All indicator plates are marked "Suppl. Prot. press to reset".

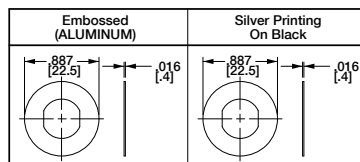

Notes: All dimensions are in [mm]. Tolerance ± 0.05 [1.27] unless otherwise specified.


- Used with bushing A or B only.
- Used with bushing A or C only.
- Used with bushing D only.
- Used with bushing E & J only.
- Used with M12 mounting hole only.
- Used with M11 and M12 mounting hole only.
- Used with mounting hole 00 only.
- Used with 27 mounting hole only.
- All hardware available separately.
- Greater than 35 amp rating must use solder joint to connect wire to non-screw type terminals.
- Terminals are .040 [1.0] thickness for ratings greater than 35 amps. Terminals are .315 [0.8] thickness is for ratings less than 35 amps.
- Available only with 10-24 unc. screw terms. (select type F, G, H, J only.) UL, CUL only.
- Amp rating must match button marking (ex: "20" will be marked on the button of the breaker)
- Thickness is 3.0 mm, .118 in.
- Screw terminals are 8-32 UNC
- Used with M11 mounting hole only.
- Includes molded in "PRESS TO RESET" marking.

8 BUTTON

B Black R Red W White

9 TERMINAL 10,11,15

A Type A
B Type B
C Type C
D Type D
E Type E
F Type F
G Type G
H Type H
J Type J
K Type K
R Type R

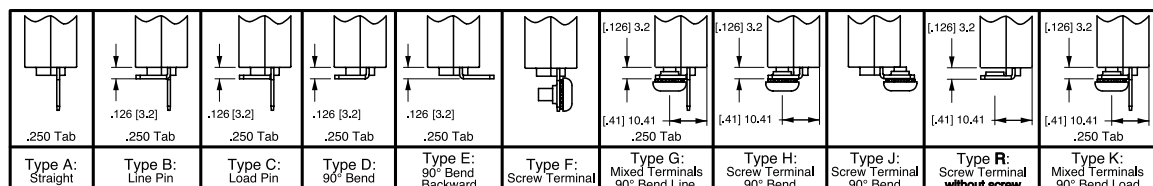


10 BUTTON MARKING (IF BLANK, NO MARKING)¹³ Button Marking Orientation:

line (20) load


03	3 amp	06	6 amp	10	10 amp	15	15 amp	25	25 amp	40	40 amp
04	4 amp	07	7 amp	12	12 amp	18	18 amp	30	30 amp	50	50 amp
05	5 amp	08	8 amp	13	13 amp	20	20 amp	35	35 amp	60	60 amp

Dimensional Specifications: in. [mm]


3-40A Construction

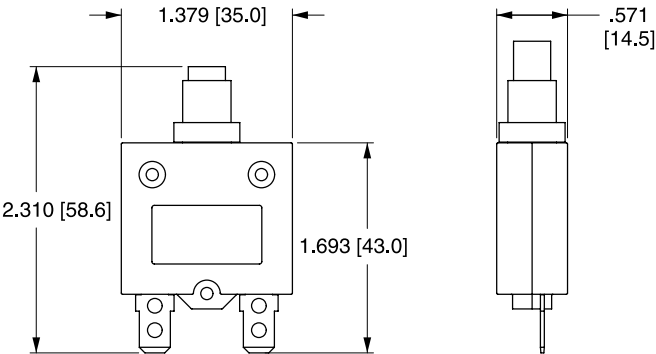

50 & 60A Construction

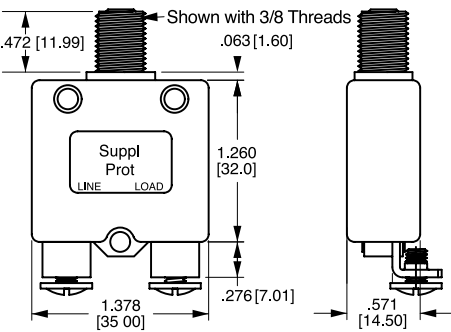

Time Delay

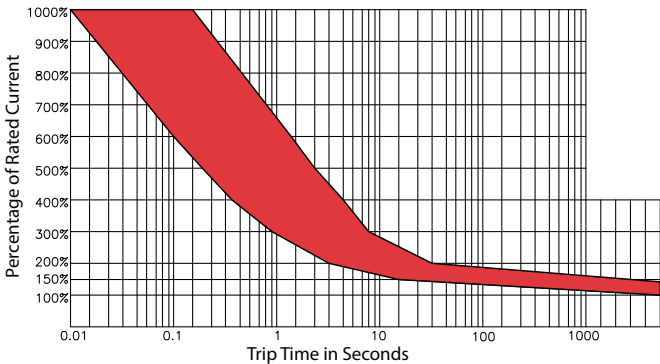

Overload	Trip Time
100%	No Trip
150%	Trip in 1 hr
200%	4.0 ~ 40 sec.
300%	0.9 ~ 8.0 sec.
400%	0.42 ~ 5.0 sec.
500%	0.25 ~ 3.0 sec.
600%	0.01 ~ 1.8 sec.

Time Trip Factor ¹	
-10 °C	x 1.70
-5 °C	x 1.60
0 °C	x 1.50
5 °C	x 1.40
10 °C	x 1.30
15 °C	x 1.20
20 °C	x 1.10
25 °C	x 1.00

Time Trip Factor ¹	
30 °C	x 0.90
35 °C	x 0.85
40 °C	x 0.80
45 °C	x 0.75
50 °C	x 0.70
55 °C	x 0.65
60 °C	x 0.60

Notes:
1. Trip Time factor is a guideline that indicates ambient temperature effect on trip times at various overload values.

CMB-Series

THERMAL CIRCUIT BREAKERS

The CMB-Series is a compact, single pole, push-to-reset family of thermal circuit breakers designed to protect equipment. Utilizing simple, precision design with few moving parts, these breakers offer cost effective, extremely reliable circuit protection with high resistance against shock and vibration.



Resources:

[Configure a Complete Part](#)

[Download CAD & Sales Drawing >](#)

Product Highlights:

- Ratings from 3-20A, 125, 250VAC, 32VDC
- 2500 VAC/1 minute
- 60°C Max Operating Temperature
- 2500A @ 32VDC Interrupting Capacity
- 100M ohms Insulation Resistance
- Voltage drop <0.25 V
- UL, cUL, CSA, TUV, CE
- UL1500/ISO8846 for ignition protection/marine

Applications:

- Household Appliances
- On/Off-Highway
- Marine
- Power Strips
- Medical Equipment
- Audio Visual Equipment
- Power Supplies
- ROHS Complaint

CMB - 10 3 - 11 C 3 N - B - A /10

1
Series

2
Rating

3
Voltage

4
Mounting
Hole

5
Bushing
Type

6
Mounting
Nut

7
Indicator
Plate

8
Button

9
Terminal

10
Button Marking


1 SERIES CMB

3 VOLTAGE 3 125-250VAC/ 32 VDC

2 RATING		10	10 amps
03	3 amps	12	12 amps
04	4 amps	13	13 amps
05	5 amps	14	14 amps
06	6 amps	15	15 amps
07	7 amps	16	16 amps
08	8 amps	20	20 amps

4 MOUNTING HOLE

11 1 M11
12 2 M12
00 3 Snap In Style
27 15 3/8" 27 UNS
28 12 3/8" 27 UNS
(double flatted)

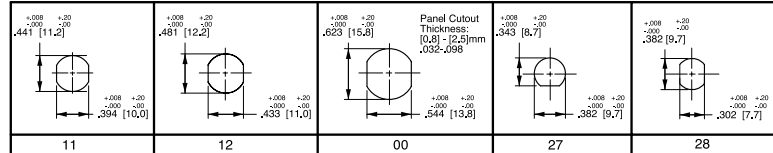


5 BUSHING

PLASTIC

C 4 Type C
D 4 Type D
E 5 Type E
G 8 Type G
H 6 Type H
K 13 Type K


METAL

J 8 Type J

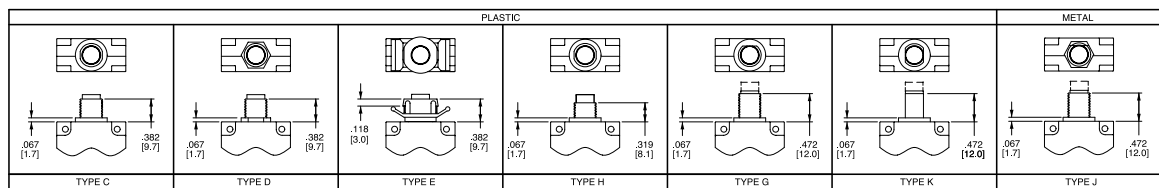

6 MOUNTING NUT 7

N None
1 Type 1
2 Type 2
3 11 Type 3
4 Type 4
5 Type 5
6 14 Type 6
7 9 Type 7
8 9 Type 8

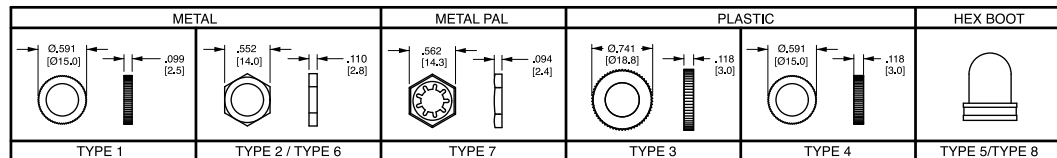


NOTE: Type 5 is clear hex boot. Type 8 is black hex boot (available for bushings G, J & K only); Type 3 nut includes molded in "PRESS TO RESET" marking.

7 INDICATOR PLATE 7

N None
A Embossed Legend
B Silver Printing
on Black

All indicator plates are marked
"Suppl. Prot. press to reset".

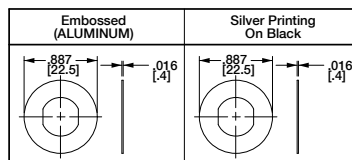

Notes: All dimensions are in [mm]. Tolerance ± 0.05 [1.27] unless otherwise specified.


- Used with bushing C or D only.
- Used with H bushing only.
- Used with bushing E only.
- Used with M11 mounting hole only.
- Used with mounting hole 00 only.
- Used with M12 mounting hole only.
- All hardware available separately.
Consult factory.
- Available with mounting hole 27 only.
- Available with G, J or K bushing only.
- Amp rating must match button marking
(ex: 20 will be marked on the button of
CMB-203-27G3N-W-A/20)
- Includes molded in "PRESS TO RESET"
marking.
- Available with K bushing only.
- Available with mounting hole 28 only.
- Thickness is 3.0 mm, .118 in.
- Available with G or J bushing only.

8 BUTTON

B Black R Red W White

9 TERMINAL

A Type A
B Type B
C Type C
D Type D
E Type E
F Type F
G Type G
H Type H
J Type J
K Type K
R Type R

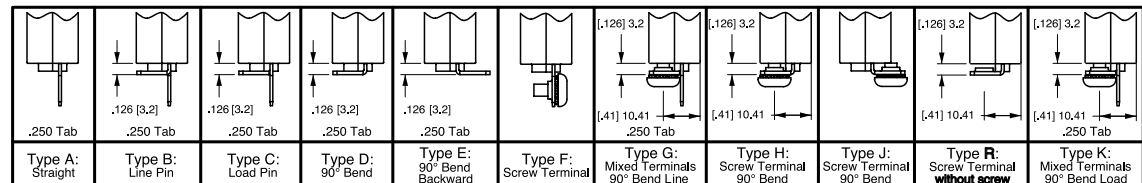


F, G, H, J TERMINALS ARE 8-32 UNC

10 BUTTON MARKING (IF BLANK, NO MARKING)¹⁰ Button Marking Orientation: line load


03 3 amp 05 5 amp 07 7 amp 10 10 amp 13 13 amp 15 15 amp 20 20 amp
04 4 amp 06 6 amp 08 8 amp 12 12 amp 14 14 amp 16 16 amp

*Manufacturer reserves the right to change product specification without prior notice.

Dimensional Specifications: in. [mm]

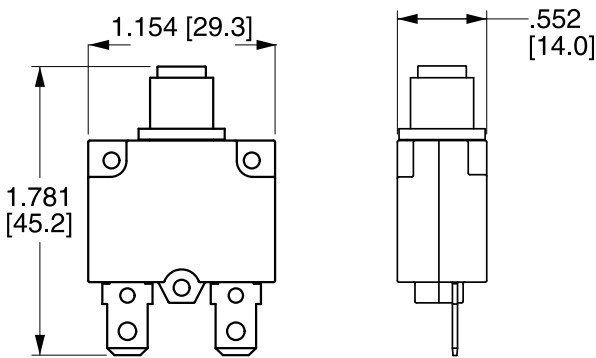

Time Delay

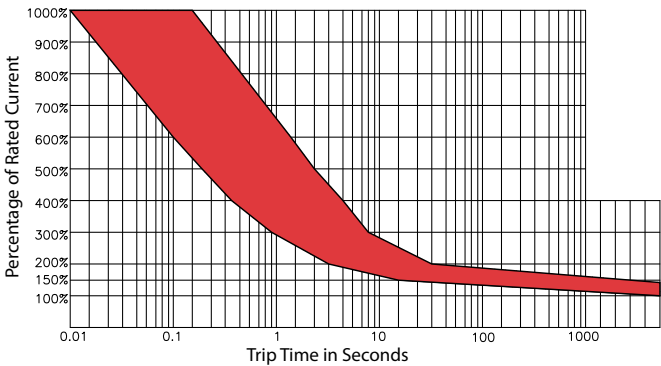

Overload	Trip Time
100%	No Trip
150%	Trip in 1 hr
200%	4.0 ~ 40 sec.
300%	0.9 ~ 8.0 sec.
400%	0.42 ~ 5.0 sec.
500%	0.25 ~ 3.0 sec.
600%	0.01 ~ 1.8 sec.

Time Trip Factor ¹	
-10 °C	x 1.70
-5 °C	x 1.60
0 °C	x 1.50
5 °C	x 1.40
10 °C	x 1.30
15 °C	x 1.20
20 °C	x 1.10
25 °C	x 1.00

Time Trip Factor ¹	
30 °C	x 0.90
35 °C	x 0.85
40 °C	x 0.80
45 °C	x 0.75
50 °C	x 0.70
55 °C	x 0.65
60 °C	x 0.60

Notes:
1. Trip Time factor is a guideline that indicates ambient temperature effect on trip times at various overload values.

CTB-Series

THERMAL CIRCUIT BREAKERS

The CTB-Series is a compact, single pole, rocker actuated family of thermal circuit breakers designed to protect equipment. Utilizing simple, precision design with few moving parts, these breakers offer cost effective, extremely reliable circuit protection with high resistance against shock and vibration. Electrical ratings range from 3 to 16 amps at 125VAC, 250VAC, 125/250VAC or 50VDC. This breaker resets with the push of a finger and features a snap in mounting style, utilizing a 16mm dia. round Double D mounting hole.



Resources:

[Configure a Complete Part](#)

[**Download CAD & Sales Drawing >**](#)

Product Highlights:

- Ratings from 3-16A, 125VAC, 250VAC, 125/250VAC, 50VDC
- .250 Tabs
- 60°C Max Operating Temperature
- 1000 AIC Interrupting Capacity
- 100M ohms Insulation Resistance
- UL, cUL, VDE, CE

Applications:

- Household Appliances
- On/Off Highway
- Marine
- Power Strips and Supplies
- Medical Equipment
- Audio Visual Equipment
- Exercise Equipment
- ROHS Complaint

CTB - **B** - **B** - **05** - **B**

1 Series 2 Bezel Color 3 Rocker Color 4 Rating 5 Panel Thickness

1 SERIES

CTB

2 BEZEL COLOR ¹

B Black

3 ROCKER COLOR ¹

B Black

4 RATING

03	3 amps	08	8 amps	14	14 amps
04	4 amps	09	9 amps	15	15 amps
05	5 amps	10	10 amps	16	16 amps
06	6 amps	12	12 amps		
07	7 amps	13	13 amps		


5 PANEL THICKNESS

blank fits standard thickness of .032 - .062
B fits .070 - .110 panel thickness

Notes:

1. Additional colors available. Consult factory.


Dimensional Specifications: in. [mm]

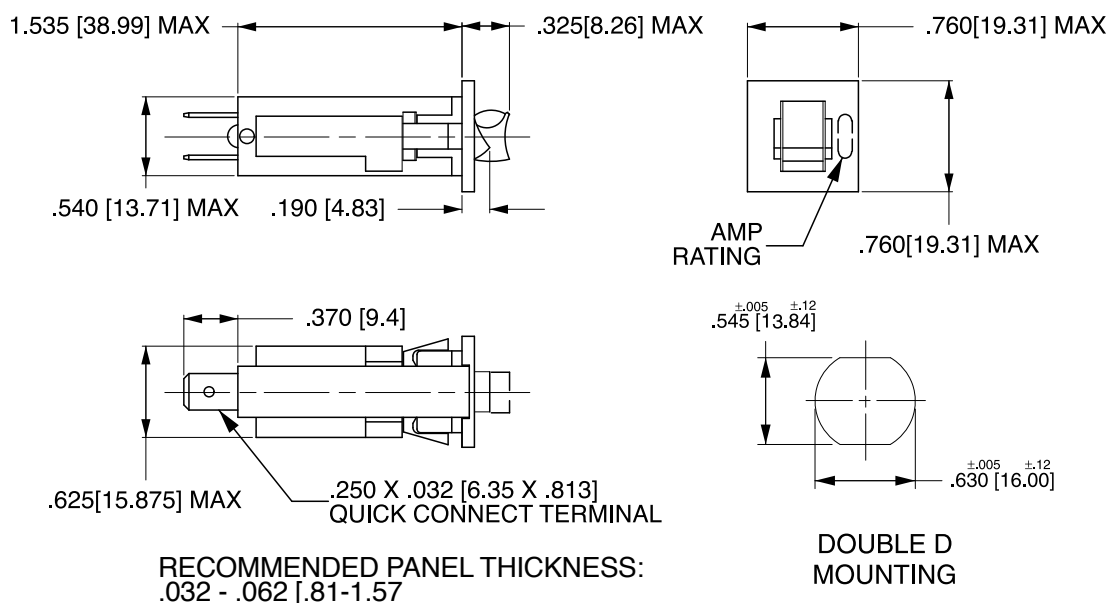

Notes:

All dimensions are in inches [millimeters]. Tolerance ± 0.005 [.127] unless otherwise specified. Breaker must hold 100% of rated current and must trip at 150% and above, within the time limits shown in curve. Trip times specified at 25° ambient with no preloading.

Time Delay

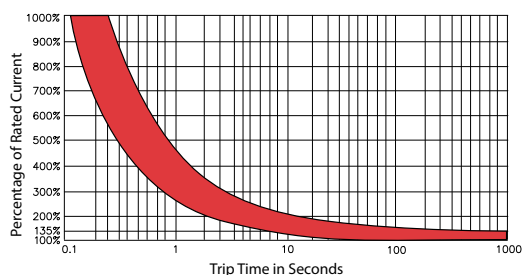

Overload	Trip Time
100%	No Trip
135%	Trip in 1 hr
200%	2.2 ~ 15 sec.
300%	0.9 ~ 3.4 sec.
400%	0.57 ~ 1.6 sec.
500%	0.38 ~ 0.94 sec.
600%	0.27 ~ 0.76 sec.

Correction Factor ¹	
0 °C	x 0.85
10 °C	x 0.90
15 °C	x 0.925
18 °C	x 0.952
25 °C	x 1.00
32 °C	x 1.05
40 °C	x 1.15
50 °C	x 1.39
60 °C	x 1.49

Notes:

1. To adjust the breaker rating for ambient temperature, multiply the breaker rating by the factor. ex: 5A rating x .850 = 4.25A. Select 4A rating.

*Manufacturer reserves the right to change product specification without prior notice.

Below is a list of useful product catalogs.

Please scan the QR codes below or visit ***carlingtech.com/onthego*** for complete details.

WEBSITE

Product Selector, Resources, Configurit,
Find Rep, Product Materials and Videos.



carlingtech.com



/onthego

SWITCHES AND CONTROLS

Rocker, toggle, pushbutton, rotary, battery
disconnects and controls.



catalog

MINI & SUB-MINI SWITCHES


Sealed and non-sealed rocker, toggle,
pushbutton and slide options.



catalog

HYDRAULIC-MAGNETIC CIRCUIT PROTECTION

1-6 poles from .02 to 700A with CSA, VDE, TUV,
UL489, UL489A, UL1500 approvals.



catalog

THERMAL CIRCUIT PROTECTION

1 pole from 3 to 60A with UL, cUL, CE,
UL1500/ISO 8846 approvals.



catalog

GFCI/ELCI CIRCUIT PROTECTION

1-3 poles from 0.10 to 50A with CSA, UL489,
UL1077, UL1053, UL1500 approvals.



catalog

Below is a list of useful market specific catalogs and brochures.
Please scan the QR codes below or visit carlingtech.com/onthego for complete details.

ON-OFF HIGHWAY

Switches, Controls and Custom Solutions



brochure

MARINE

Circuit Protection and Switches



brochure

RENEWABLE ENERGY

Circuit Breakers and Disconnect products



brochure

MILITARY

COTS Switches and Circuits Breakers



brochure

TELECOM/DATACOM

Hydraulic-Magnetic Circuit Breakers



brochure

INDUSTRIAL AUTOMATION

Switches and Circuit Breakers



brochure

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications

European Headquarters

Carling Technologies LTD

4 Airport Business Park, Exeter Airport,
Clyst Honiton, Exeter, Devon, EX5 2UL, UK

Phone: Int + 44 1392.364422

Email: ltl.sales@carlingtech.com

Sales Offices:

Germany:

gmbh@carlingtech.com

France:

sas@carlingtech.com

Worldwide Headquarters

Carling Technologies Inc.

60 Johnson Avenue,
Plainville, CT 06062 USA

Phone: 860.793.9281

Email: sales@carlingtech.com

Sales Offices:

Northern Region: nrsm@carlingtech.com

Southeast Region: sersm@carlingtech.com

Midwest Region: mrsm@carlingtech.com

West Region: wrrsm@carlingtech.com

Latin America: larsm@carlingtech.com

Asia-Pacific Headquarters

Carling Technologies, Asia-Pacific LTD.,

Suite 1607, 16/F Tower 2, The Gateway, Harbour City, 25
Canton Road, Tsimshatsui, Kowloon, Hong Kong

Phone: Int + 852-2737-2277

Email: sales@carlingtech.com.hk

Sales Offices:

Shenzhen, China: shenzhen@carlingtech.com

Shanghai, China: shanghai@carlingtech.com

Pune, India: india@carlingtech.com

Kaohsiung, Taiwan: taiwan@carlingtech.com

Yokohama, Japan: japan@carlingtech.com



WWW.CARLINGTECH.COM